


Installation instructions for Merika® build-up ring

Merika no. 414

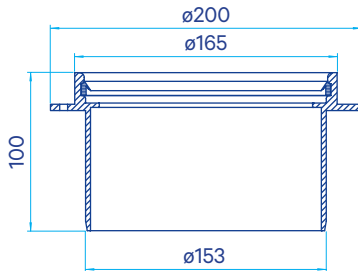

- Size: 150 × 100
- Weight/kg: 0,272
- HVAC no: 3318155
- For vinyl floor and tile installation
- For wooden and concrete floors
- The delivery includes 3 screws

- Note! The build-up ring must be cut straight.
- The build-up ring is lubricated with a lubricant and pressed to its place.
- Note in the installation that the screws of the build-up ring (3 pcs) are screwed to their places but **not tightened**. The screws do not need to be tightened as the sealing is in the over sheath of the build-up ring/floor drain. Tightening the screws will deform the floor drain/build-up ring.

Spare parts:

M-202_03 Lip seal for a floor drain, new 160

Practical screw fastening
to a floor drain



Meriser Oy
Kauppatie 2, 29900 Merikarvia
tel. 0207 189 810
www.merika.fi, merika@meriser.fi

In addition to this guide, the decrees 782/2017 on Humidity control performance and 1047/2017 on Water supply and sewerage equipment of properties given by the Ministry of the Environment shall be followed. The installation work must always be made by a HVAC professional. We follow the terms of the Association of Technical Traders.




Quality for HVAC
Technology



Monteringsanvisning for Merika® oppføringsring

Merika nr. 414

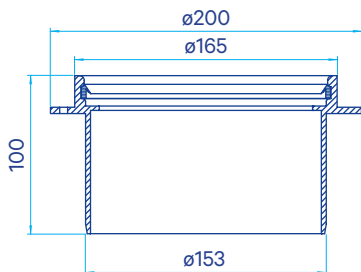

- **Størrelse:**
150 × 100
- **Vekt/kg:** 0,272
- **HVAC nr:** 3318155
- Til installasjon av vinylgulv og fliser
- Til tre- og betonggulv
- Leveransen inkluderer 3 skruer

- Merknad! Oppføringsringen må kuttes rett.
- Oppføringsringen smøres med et smøremiddel og presses på plass.
- Ved montering må skruene i oppføringsringen (3 stk.) skrues på plass, men **ikke strammes**. Skruene trenger ikke strammes fordi tetningen er i mantelen på oppføringsringen/gulvsluket. Stramming av skruene vil deformere gulvsluket/oppføringsringen.

Reservedeler:

M-202_03 Leppetetning til et gulvavløp, ny 160

Praktisk skruemontering til et gulvsluk



Meriser Oy

Kauppatie 2, 29900 Merikarvia
tel. 0207 189 810
www.merika.fi, merika@meriser.fi

I tillegg til denne veiledningen må forordning 782/2017 om fuktighetskontroll og 1047/2017 om vannforsynings og avløpsutstyr i bygninger, gitt av Miljødepartementet, følges. Tilkoblingen må foretas av en autorisert rørlegger. Vi følger de generelle salgsbetingelsene til den Tekniske Handelsforeningen.



Quality for HVAC
Technology

